



MODEL	A	B	C	D	E
CAA-EPH-40	116"	40"	33"	36"	37"
CAA-EPH-52	116"	52"	33"	48"	49"
RCCC MOUNT	116"	40/52"	33"	39"	39.5"

** OPTIONAL 100, 200 AND 400 DISCONNECTS ARE AVAILABLE. THE 200 AND 400 AMP DISCONNECT MUST BE SHIPPED LOOSE FOR FIELD MOUNTING

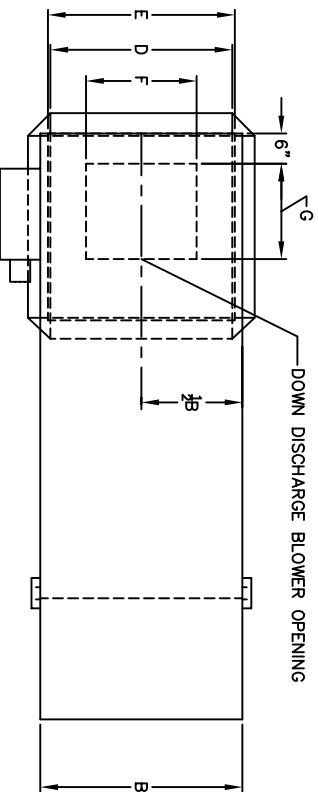

PLAN VIEW

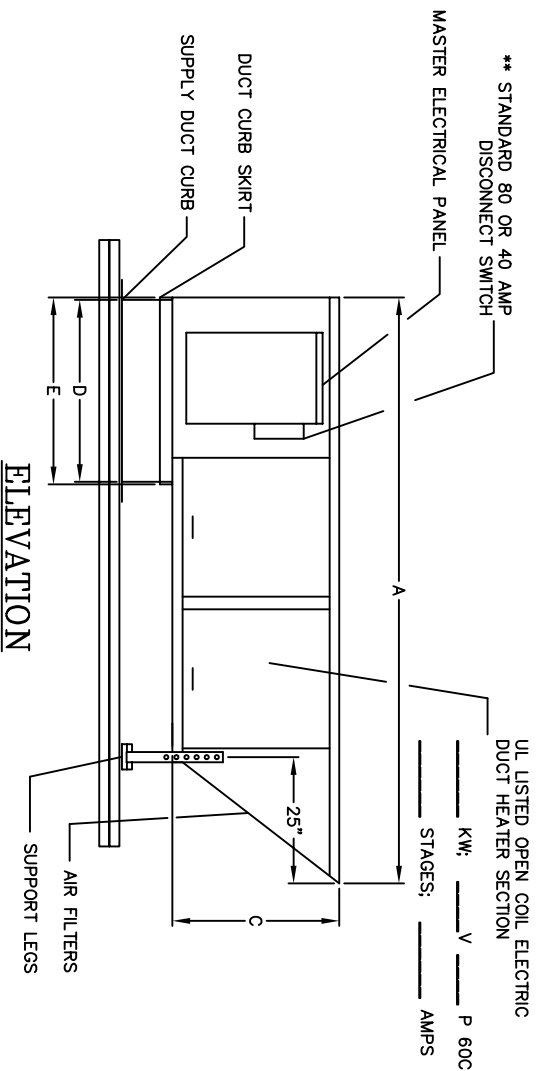

ELEVATION

WHEEL SIZE	F	G
9-7	9 3/8"	10 1/4"
9	11 1/8"	10 1/4"
10	13 3/8"	11 3/8"
12-9	12 1/4"	13 7/8"
12	15 5/8"	13 7/8"
15-10	14 1/8"	15 7/8"
15	18 5/8"	15 7/8"
18	21 7/8"	18 7/8"

ITEM	MODEL	FAN			MOTOR			OPTIONS		
		CFM	T.S.P.	RPM	HP	VOLT	PH			

MODEL CAA-EPH ELECTRIC HEAT

SPECIFICATIONS

CONSTRUCTION - ALL 18 GA. ALUMINIZED STEEL WEATHERPROOF WELDED CABINET. EXTERIOR FINISHED WITH AN INDUSTRIAL ENAMEL OVER A PRIMER BASE.

BLOWER - HEAVY GAUGE DWID FORWARD CURVED BLOWER WITH A 3/4" OR 1" GROUND SHAFT, FIXED PULLEY AND SEALED BALL BEARINGS. OPTIONAL HEAVY DUTY BLOWER WITH PILLOW BLOCK BEARINGS IS AVAILABLE.

MOTOR - ODP CONTINUOUS DUTY MOTOR WITH DOUBLE-SHIELDED BALL BEARINGS AND ADJUSTABLE PULLY. ALL THREE PHASE MOTORS MEET OR EXCEED THE EPACT 92 STANDARDS. TEFC MOTORS AND NEMA PREMIUM EFFICIENCY MOTORS ARE AVAILABLE.

AIR FILTERS - 1" PERMANENT AND WASHABLE ALUMINUM MESH TYPE FILTERS.

PROJECT

DATE

REFERENCE #

LOCATION

REPRESENTATIVE

CONTRACTOR

Duo-Aire

316 W. CENTRAL AVE.

SUITE 505

WINTER HAVEN, FL. 33880

(863) 294-2272

(863) 294-2704 FAX