

## MODEL CAA-IND


INDIRECT GAS FIRED MAKE UP AIR UNIT

**STANDARD FEATURES:**

- \* ALUMINIZED STEEL WELDED HOUSING WITH INDUSTRIAL FINISH.
- \* DWID CENTRIFUGAL BLOWER WITH MOTOR, DRIVE, AND PULLEYS.
- \* COMPLETE FACTORY PANEL PRE-WIRED WITH DISCONNECT SWITCH, MOTOR STARTERS, TEMPERATURE LIMIT SWITCH, AIR PRESSURE SWITCH, AND GAS MODULATION CONTROLS.
- \* 80% EFFICIENT INDIRECT GAS FIRED FURNACE, 800 MBH MAX. HEAT INPUT. 4:1 TURN DOWN RATIO
- \* GAS TRAIN INCLUDES PRESSURE REGULATOR, VALVES, AND FLAME SAFEGUARD.
- \* OPTIONAL COOLING COILS AVAILABLE

INDIRECT FIRED NATURAL GAS PREHEAT  
 AGA CERTIFIED FOR OUTDOOR USE  
 3/4" GAS LINE CONNECTION SIZE:  
 MIN. GAS PRESSURE - 5" W.C.  
 MAX. GAS PRESSURE - 14" W.C.

SPUN ALUMINUM EXHAUST FAN  
 WITH DISCONNECT, HINGED BASE,  
 AND GREASE COLLECTION DEVICE,  
 UL LISTED FOR GREASE LADEN AIR.  
 (OPTIONAL)

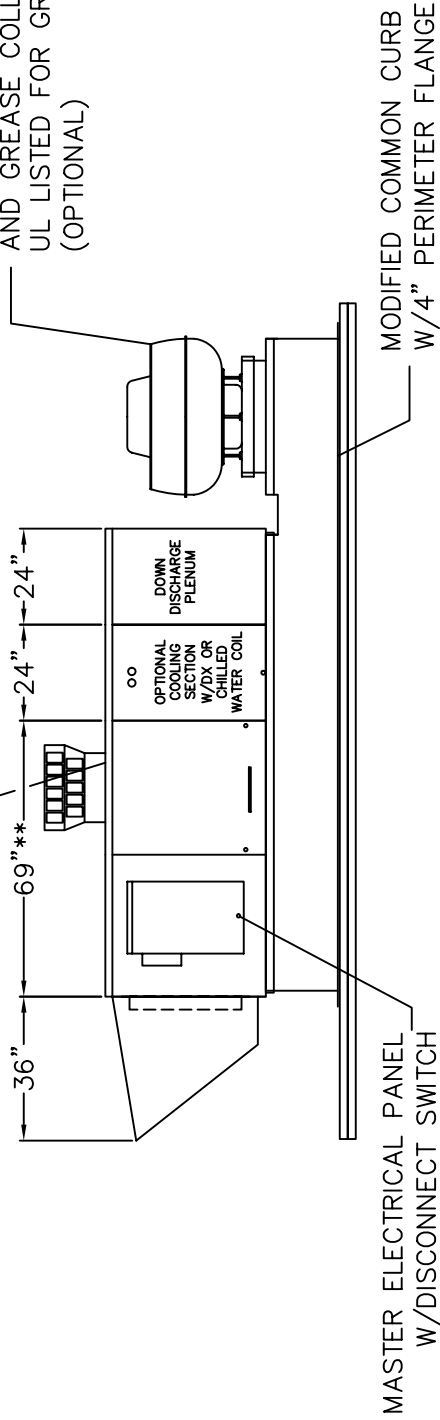

\*\* FOR DOUBLE FURNACES, THE LENGTH IS 102½"

**Duo-Aire**  
INC.





# MODEL CAA-CC

TEMPERED MAKE-UP AIR UNIT



REPORT #527941

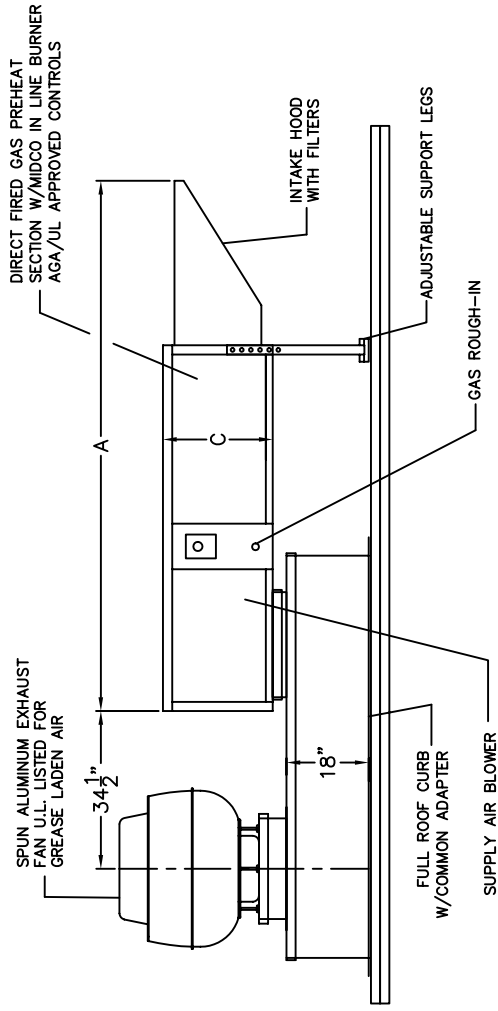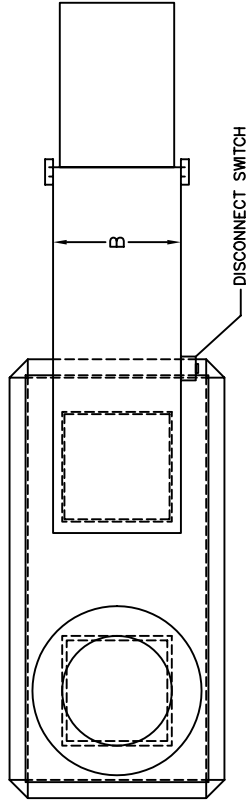

MODEL	A	B	C
CAA-1D-9-7	116"	28"	24"
CAA-1D-9	116"	28"	24"
CAA-1D-10	116"	28"	24"
CAA-1D-12-9	116"	28"	24"
CAA-1D-12	116"	28"	24"
CAA-1D-15-10	122"	40"	30"
CAA-1D-15	122"	40"	30"
CAA-2D-15	122"	40"	30"
CAA-2D-18	130"	40"	36"
CAA-3D-18	130"	40"	36"
CAA-3D-18HD	138"	52"	36"
CAA-4D-18HD	138"	52"	36"

Duo-Aire  
INC.

