

Concentric Ductwork


UL listed concentric supply and exhaust ductwork for kitchen ventilation systems, built in compliance with NFPA-96 requirements. This duct is listed for 1" clearance to combustible materials. UL listed slip joints allow for ease of installation for all vertical duct runs. Concentric duct may be used in vertical and/or horizontal configurations, as well as pantlegs, tees, elbows and offsets. This duct may be utilized to combine multiple hood sections to a single duct riser, allowing for a single point penetration of roof. The duct system includes UL listed cleanout doors as required by code.

STANDARD FEATURES

- 18 Gauge Stainless Steel Exhaust Duct
- 18 Gauge Aluminized Steel Supply Duct
- UL Listed 1" Clearance to Combustibles
- UL Listed Access Doors Per Listing Requirements
- UL Listed Slip Joints on all Vertical Connections
- Welding Flanges on all Non-Vertical Connections
- Available on all Duo-Aire Hood Models

OPTIONS

- Pant Leg Ducts for Multiple Hood Connections
- Offsets up to 90 Degrees
- Supply Air Crossover Ducts for Single Plenum Hoods

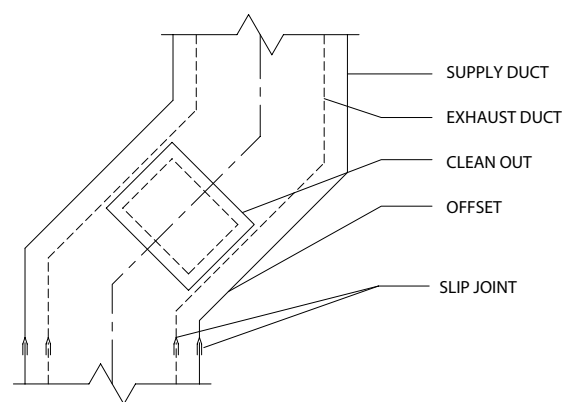


OFFSET

(See reverse side for other options)


BUILT IN
ACCORDANCE
WITH NFPA 96




UL # MH 10644 GREASE DUCTS FOR
RESTAURANT COOKING APPLIANCES

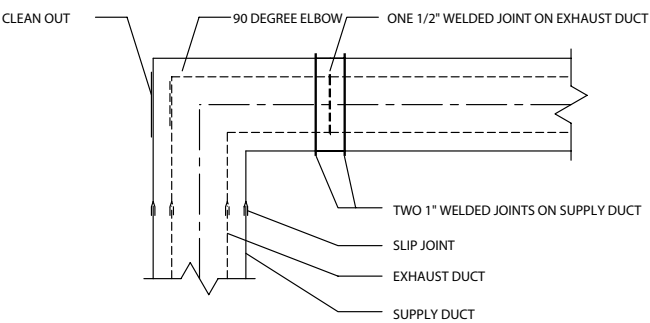


HORIZONTAL DUCT
W/WELDED JOINT CONNECTION

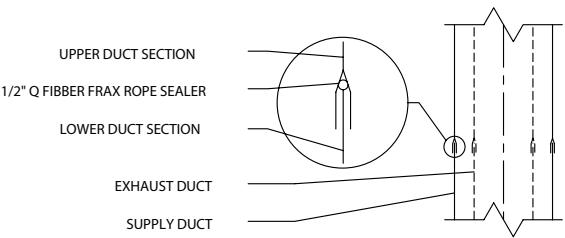

VERTICAL DUCT
W/SLIP JOINT CONNECTION

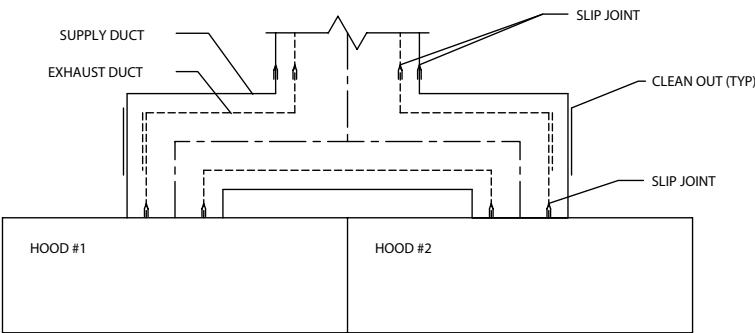

TEE-DUCT

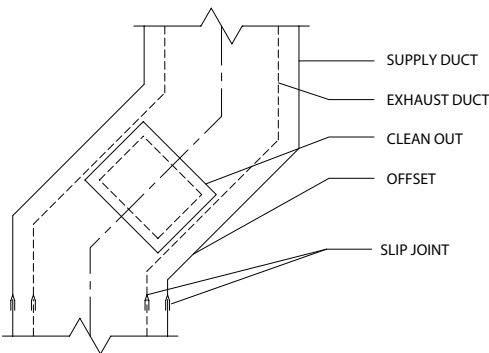

OFFSET

Duo-Aire reserves the right to make changes in design and specifications without prior notice.